10–100 W Super Slim LED Floodlights – White

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × slim floodlight with bracket and 0.6 m 3-core lead
- Waterproof connector and plug with cord: optional extra
- Wall fixings and junction box not included

YOU WILL NEED

- Drill and wall plugs/screws to suit the surface
- Screwdriver
- Wire stripper
- Voltage tester
- IP-rated junction box or waterproof connector

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Check the wall or beam can hold the light (up to 1.35 kg for 100 W).
- Plan the junction box within reach of the 0.6 m lead, with the cable run so water drains away from the join.

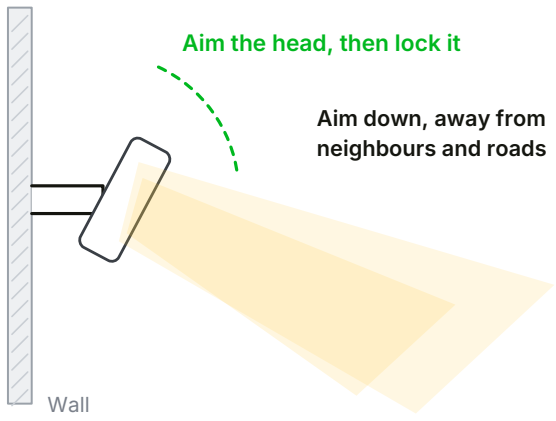

STEP BY STEP

1. Hold the bracket in place and mark the fixing holes.
2. Drill and fit plugs to suit the wall, then screw the bracket on firmly.
3. Join the light's lead to the supply in an IP-rated junction box or waterproof connector: brown to Active, blue to Neutral, green/yellow to Earth.
4. Tilt the light to aim it, then tighten the bracket screws.
5. Turn the power on and check it works.

SETTINGS & USE

- Starts instantly, so it can be switched by a separate motion sensor (not included).

DO NOT

- Don't connect to a dimmer.
- Don't leave the cable join exposed to rain.
- Don't open the sealed light body.

CARE & TROUBLESHOOTING

- Turn off, then wipe the glass with a soft damp cloth; no solvents.
- If it won't start, check the supply and the cable join.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 2 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.