INSTALLATION GUIDE

Product code: WL12-18-CCT-SENSOR

12 W or 18 W LED Sensor Wall Light – Tricolour

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × sensor wall light with built-in driver and mounting base
- Wall plugs and screws

YOU WILL NEED

- Drill and masonry bit
- Screwdriver
- Allen (hex) key
- Spirit level
- Wire stripper

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Mount 1.5–2.5 m high so the sensor can see people coming.
- Keep it away from heaters, vents and moving plants that can trigger it.

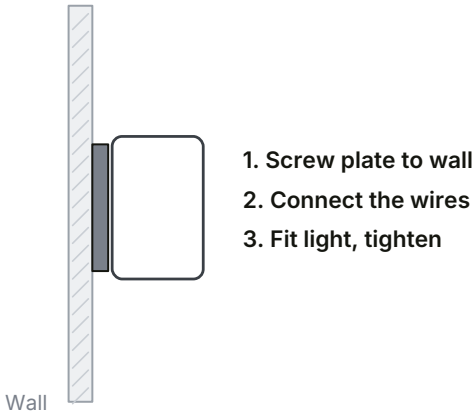

STEP BY STEP

1. Loosen the small screws on the sides with an Allen key and lift the light off its base.
2. Hold the base on the wall, mark the holes, drill and fit plugs.
3. Feed the cable through a cable entry (one or two entries for loop-through).
4. Screw the base to the wall.
5. Connect Active (L), Neutral (N) and Earth. Strip 8–10 mm; wire size 0.5–2.5 mm².
6. Set the colour switch, refit the light on its base and tighten the side screws.
7. Turn the power on. Test at night: walk past and check it turns on.

SETTINGS & USE

- Colour switch on the back: 3000 K, 4000 K or 5700 K.
- Sensor lights it only when it is dark (below about 30 lux) and movement is seen.
- Leave the wall switch on – the sensor only works while the light has power.

DO NOT

- Don't use with a dimmer.
- Don't aim the sensor at a busy road or hot air vents.
- Don't block the sensor window.

CARE & TROUBLESHOOTING

- Wipe with a soft damp cloth; keep the sensor window clean.
- If it stays on or won't trigger, check nothing is moving or blocking the sensor.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.