INSTALLATION GUIDE

Product code: DL25S-Tuya

160 mm 25 W Smart LED Downlight – Tuya WiFi

We recommend a licensed electrician for the whole install – they must cut the hole and fit the light, driver and ceiling plug socket (AS/NZS 3000). You can do the app setup afterwards.

IN THE BOX


- 1 × LED downlight with spring clips
- 1 × separate smart driver with lead and plug

YOU WILL NEED

- 160 mm hole saw or circle cutter
- Voltage tester
- Stable ladder
- Phone with the Smart Life app

BEFORE YOU START

- Electrician: turn off the power at the switchboard and test that it is off.
- Keep insulation away from the light and driver (not IC rated). Allow 45 mm of depth plus room to lay the driver flat.
- Check your home WiFi has a 2.4 GHz network and reaches the room.

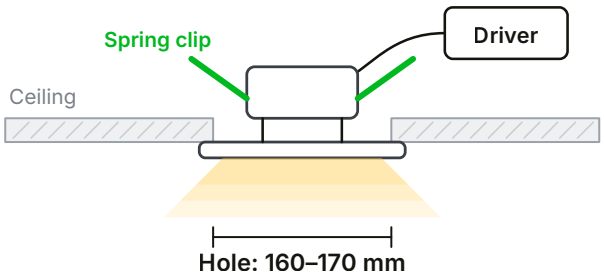

STEP BY STEP

1. Electrician: cut a 160–170 mm hole in the ceiling.
2. Electrician: join the light's lead to the smart driver's connector.
3. Electrician: plug the driver into the ceiling plug socket and lay it flat in the ceiling space.
4. Electrician: fold the spring clips up and push the light into the hole.
5. Turn the power on and leave the wall switch on.
6. In the Smart Life app tap '+', choose the light and follow the steps.
7. Name the light and add it to a room, group or timer.

SETTINGS & USE

- Brightness and colour (3000–5700 K) are set in the app.
- Link the Smart Life app to Alexa or Google Home for voice control.
- If the app cannot find the light, follow the reset steps in the app, or call Greenhse.

DO NOT

- Do not cover the light with ceiling insulation.
- Do not connect it to a wall dimmer.
- Do not turn the wall switch off if you want app or voice control.

CARE & TROUBLESHOOTING

- Turn the power off, then wipe the cover with a soft dry cloth.
- If the light goes offline, check your WiFi, then turn the power off and on again.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.