70 mm 7 W Gimbal LED Downlight – Black, IP65

240 V mains power – this light must be installed by a licensed electrician to AS/NZS 3000. Turn the power off at the switchboard first.

IN THE BOX

- 1 × 7 W gimbal downlight (matte black)
- 1 × driver with push-fit terminals, joined to the light by a short lead

YOU WILL NEED

- Drill with 70 mm hole saw
- Wire strippers
- Small flat screwdriver
- Safety glasses and dust mask

BEFORE YOU START

- Check the ceiling space is at least 45 mm deep.
- Keep 25 mm clear of joists and timber, and keep ceiling insulation off the light and driver.
- Check your dimmer is suitable for LED lights.

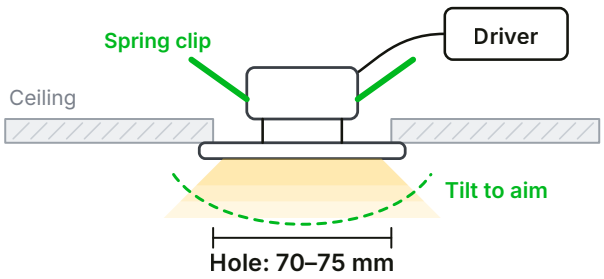

STEP BY STEP

1. Turn the power off at the switchboard.
2. Cut a round hole 70–75 mm wide in the ceiling.
3. Open the driver cover and lift the push-fit terminal levers.
4. Connect the 240 V active and neutral to the input terminals. Use the second set to loop on to the next light.
5. Press the levers down so the wires are held tight, then close the cover.
6. Set the colour switch on the driver to 3000 K, 4000 K or 6000 K.
7. Push the driver through the hole, hold the springs up against the light and push it into the hole.
8. Turn the head to aim the light, then turn the power on and test.

SETTINGS & USE

- Colour switch on the driver: 3000 K warm, 4000 K natural, 6000 K bright.
- Set the colour before fitting – the driver sits above the ceiling.

DO NOT

- Don't link more than 20 lights in one run.
- Don't let the driver get wet – only the light is IP65.
- Don't work on the light with the power on.

CARE & TROUBLESHOOTING

- Turn the power off and wipe the lens with a soft, damp cloth.
- If it flickers or won't turn on, check the dimmer and the terminal connections; if it keeps happening, call Greenhse on (08) 9297 2969.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 5 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.