INSTALLATION GUIDE

Product code: DL9RGBW-PBT

90 mm 9 W Smart Colour Downlight – Low Glare

We recommend a licensed electrician for the whole install – they must cut the hole and fit the light and its ceiling plug socket (AS/NZS 3000). You can do the app setup afterwards.

IN THE BOX

- 1 × smart LED downlight with built-in driver, spring clips, lead and plug

YOU WILL NEED

- 90 mm hole saw
- Voltage tester
- Stable ladder
- Phone with the Smart Life app

BEFORE YOU START

- Electrician: turn off the power at the switchboard and test that it is off.
- A ceiling plug socket (plug base) is needed near each light; the light needs 57 mm of space above the ceiling.
- For Alexa, Google Home or control away from home, you need a Bluetooth gateway.

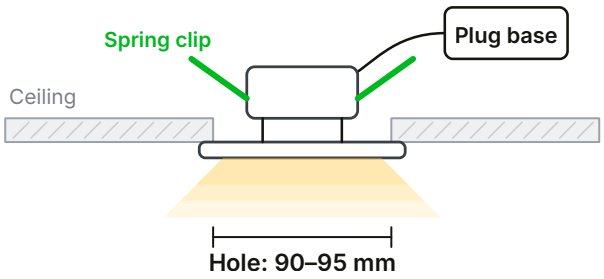

STEP BY STEP

1. Electrician: cut a 90–95 mm hole in the ceiling.
2. Electrician: plug the light's lead into the ceiling plug socket.
3. Electrician: fold the spring clips up and push the light into the hole.
4. Turn the power on and leave the wall switch on.
5. Turn on Bluetooth on your phone and open the Smart Life app.
6. Tap '+', choose the light and follow the steps.
7. To add voice control, add the Bluetooth gateway in the app, then link Alexa or Google Home.

SETTINGS & USE

- Colour, white (2700–6500 K), brightness, scenes and timers are set in the app.
- Music mode: the light changes with music your phone hears.
- If the app cannot find the light, follow the reset steps in the app, or call Greenhse.

DO NOT

- Do not connect it to a wall dimmer.
- Do not turn the wall switch off if you want app or voice control.
- Do not use where water can spray or pool on it.
- Do not cover the light with ceiling insulation.

CARE & TROUBLESHOOTING

- Turn the power off, then wipe the cover with a soft dry cloth.
- If the light will not respond, move your phone closer, or turn the power off and on again.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty.
Warranty: 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.