INSTALLATION GUIDE

Product code: d-pp2usb3

# Double Power Point with 2 × USB-A and USB-C

**240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.**

## IN THE BOX


- 1 × double power point with USB-A and USB-C
- 2 × cover plates (square edge and round edge)

## YOU WILL NEED

- Flat screwdriver
- Phillips screwdriver
- Voltage tester

## BEFORE YOU START

- Choose the square-edge or round-edge cover.
- Check the wall box or cavity has room for the body, which sits about 28 mm deep behind the plate.
- Check the wall box has Active, Neutral and Earth wires.
- Turn off the power at the switchboard and test it is dead.

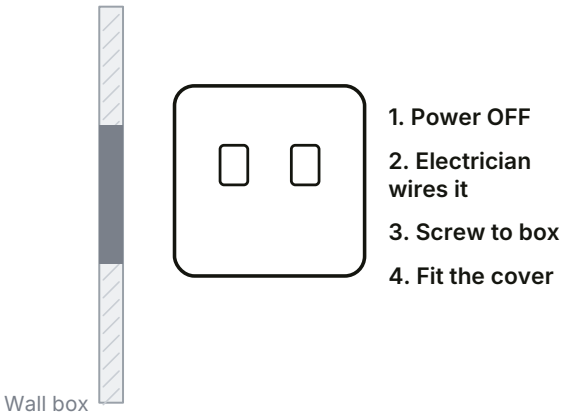


## STEP BY STEP

1. Remove the old power point from the wall.
2. Connect Active, Neutral and Earth to the terminals marked on the back. Tighten firmly.
3. Fold the wires neatly into the wall box.
4. Line up the screw holes using the adjustable screw slots, then screw it to the wall (reuse the old plate screws if no screws are supplied).
5. Clip on the cover you chose.
6. Turn the power back on and test both outlets with their switches.
7. Plug in a phone to check the USB-A and USB-C ports charge.

## DO NOT

- Do not plug in more than 10 A in total.
- Do not use it outdoors or in wet areas.
- Do not push anything except a charging cable into the USB ports.

## CARE & TROUBLESHOOTING

- Wipe with a dry or slightly damp cloth with the outlets switched off.
- If USB charging stops, check the power is on at the switchboard, then call Greenhse.

**Installation:** Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 5 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.