Quick Connect Plug Base – Single 10 A

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- Box of 10 quick connect plug bases

YOU WILL NEED

- Cable sheath stripper or knife
- Small flat screwdriver
- Voltage tester

BEFORE YOU START

- Check the cable is 1–2.5 mm² stranded or solid.
- Check the plug load is 10 A or less.
- Pick a spot close enough for the light's plug lead to reach easily, e.g. next to the light in the ceiling space.
- Turn off the power at the switchboard and test it is dead.

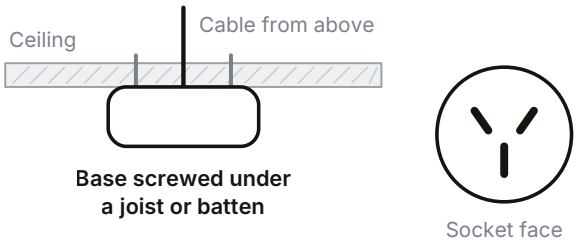

Power OFF before any work
Electrician wires A, N and E
Cover on before power on

STEP BY STEP

1. Open the lid fully to show the wire channels.
2. Strip only the outer sheath, 45 mm long. Use the strip guide on the lid. Do not strip the single wires.
3. Lay each wire in its channel using the colour guide (Active, Neutral, Earth).
4. Close the lid, keeping each wire in its channel.
5. Pull the lever to the closed position. The pins pierce the insulation and the clips lock.
6. Fix the base to a solid surface (joist or batten) with screws to suit.
7. Turn the power on and test with a plug-in tester.

DO NOT

- Do not use cable outside 1–2.5 mm².
- Do not strip the insulation off the single wires.
- If re-using a base, do not use the same pin holes again.
- Do not load it over 10 A.

CARE & TROUBLESHOOTING

- To open a locked base, twist a small screwdriver in the clip on each side.
- If the light does not work, check each wire sits fully in its channel.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 5 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.