RGB / RGBW / RGB+CCT Smart Strip Controller

Licensed electrician recommended. Turn the power off before wiring. Greenhse's warranty needs a licensed electrician to install it, and any 240 V work is electrician only.

IN THE BOX

- 1 × 3-in-1 smart LED strip controller
- Remote control not included – order separately

YOU WILL NEED

- Small flat screwdriver
- Wire strippers
- Junction box
- Multimeter (optional)

BEFORE YOU START

- Check the strip and transformer are the same voltage (12 V or 24 V).
- Check the strip uses no more than 6 A per colour and 12 A in total: amps = watts ÷ volts (e.g. 120 W ÷ 24 V = 5 A).
- Have your 2.4 GHz WiFi name and password ready.
- Also buy a 12 V or 24 V transformer, sized as shown on the Greenhse transformer sheet (TR12V-ALL / TR24V-ALL); a 2.4 GHz remote is optional.

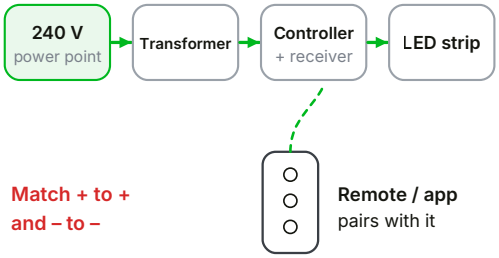

STEP BY STEP

1. Switch off and unplug the 12 V or 24 V transformer.
2. Connect the transformer's + wire to the controller's V+ input and – to V–. Reversing them can damage the controller.
3. Connect the strip's + wire to V+, then the R, G, B (and W / WW) wires to the matching terminals on the label.
4. Fit the controller in a junction box in a dry place, away from large metal surfaces that cut the signal.
5. Check no bare wires touch, then turn the power on.
6. Press SET until the light shows the mode that matches your strip.
7. Add the controller in the app, and link a remote if you want one.

SETTINGS & USE

- Output mode: keep pressing SET until the controller light shows your strip type – red = RGB, green = RGBW, blue = RGB+CCT. One single press puts it into remote-linking mode instead.
- Link a remote: turn the power off for 10 seconds, turn it back on, then within 3 seconds press the zone ON button 3 times. The strip blinks 3 times slowly when linked.
- App: add the controller in the Tuya Smart / Smart Life app over 2.4 GHz WiFi, then name it and set scenes.

DO NOT

- Don't connect or change wires while the power is on.
- Don't connect the controller to 240 V – it is for 12–24 V DC only.
- Don't go over 6 A per colour or 12 A in total.
- Don't use it outdoors or in wet areas (IP20, indoor only).

CARE & TROUBLESHOOTING

- Keep the controller dry and dust free; wipe with a dry cloth only.
- Strip not lighting? Check the + and – wires and that the transformer is on.
- Remote not working? Change its batteries and link it again.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 2 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.