




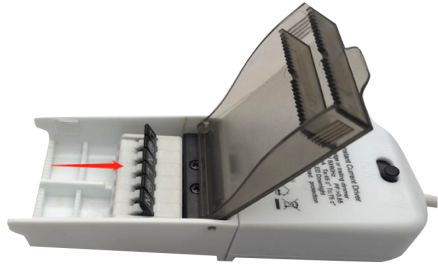

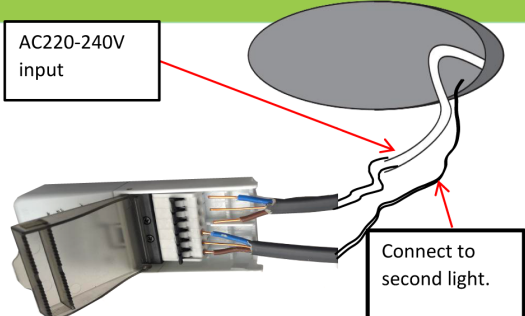


A qualified electrician, in accordance with IEE wiring regulations, must carry out the connection to mains wiring.
Mains supply 220/240VAC 50/60Hz

DL 7/10W IP65 70/90mm

FIRE RATED LED DOWNLIGHT BS476-20:1987 FIRE TEST STANDARD



<p>1. Disconnect mains supply before commencing installation.</p>	<p>2. Pull up all the terminals on the driver.</p>
<p>Cut a 70-75mm Circular hole in the ceiling</p> 	
<p>3. Pull cable through hole and wire to connector shown.</p>	<p>4. Press all terminals on the driver to make sure the wires are well connected.</p>
 <p>AC220-240V input</p> <p>Connect to second light.</p>	
<p>5. Press the cover and set CCT switch position</p>	<p>6. Lift and hold springs close to main body and insert into ceiling void.</p>
	
<p>7. Complete the installation on the ceiling. RECOMMENDED HCB&SCB 25mm</p>	<p>8. 360° Rotatable according to customer's requirements.</p>
	 <p>360° free rotation</p>