

DL8AG / DL15AG

8W/15W Gimbal Low Glare Downlight



KEY INFORMATION	DL8AG	DL15AG
LUMEN OUTPUT	660-760lm	1300-1500lm
INPUT POWER	8W	15W
HOLE CUTOOUT SIZE	Ø83mm	2 x Ø83mm
WARRANTY	3 Years	
LIFESPAN	50000Hrs	
IP RATING / IK RATING	IP54 (Cover) / IP20 (Back)	
HOUSING COLOUR	Matte White, Matte Black	
INSTALL	Recessed, spring clips	
PHOTOMETRIC		
EFFICACY	Up to 95 Lms/W	Up to 100 Lms/W
COLOUR SELECTABLE	2 CCT - 3000/4000k Selectable	
BEAM ANGLE	36°	
CRI	90	
ELECTRICAL		
INPUT VOLTAGE	AC220-240V, 50-60Hz	
CONSTRUCTION		
MATERIAL CONSTRUCTION	Aluminium + PC	
SHADE/HOUSING	Matte White, Matte Black	
DIMENSIONS	97x97x40mm (Square)	Ø177x97x40mm
WEIGHT	0.31Kg	0.56Kg
CERTIFICATION/WARRANTY	CE, RCM, Australian Certified 3Yr Warranty	

DESCRIPTION:

NEW Premium Aluminium gimbal downlight available in 4 different styles. It has very attractive diffuser with a low beam angle and 23° gapless tilt in all directions (360°).

Essential for low glare comfort and with no flicker. Recommended for specific applications and to highlight special features.


Very efficient with high lumen output and no UV. Aluminium housing provides great heat dissipation. Quick install and maintenance.

FEATURES:

- Aluminium, low glare, fully sealed (gapless) 23° tilt
- Suitable for covering with insulation material (IC4 rated).
- Easy installation with push terminals, loop-in / out design.
- PF ≥ 0.85
- Two selectable colour setting 3000K/4000K .
- IP54 at the front, IP20 at the back
- External flicker free driver, for easy replacement.
- Triac dimmable
- One/two light combos available.
- Matte White or Matte Black trim

SUITABLE FOR:

- Offices and upmarket homes
- Picture or wall features, highlight or feature areas
- Offices
- Hotels
- Reception areas & Corridors

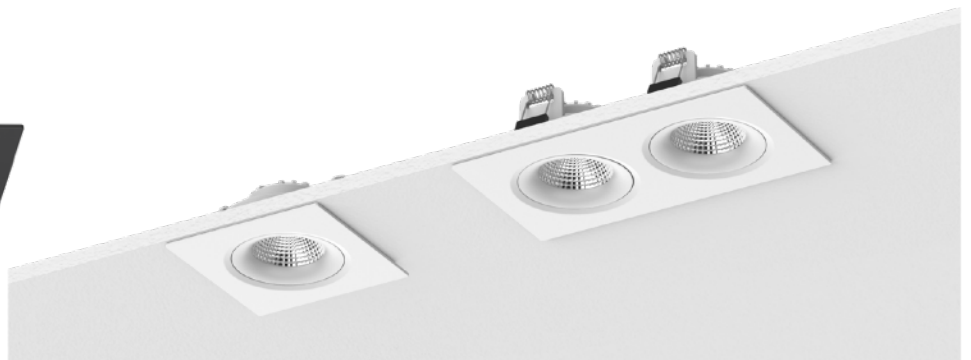

MODEL	WATTAGE	LUMENS	EFFICACY	2 CCT
DL8GA	8W	660-760lm	Up to 95 Lms/W	3000/4000k
DL15GA	15W	1300-1500lm	Up to 100 Lms/W	3000/4000k

DL8AG / DL15AG

8W/15W Gimbal Low Glare Downlight

