

# GH-C100CCT

## LED CANOPY LIGHT



### KEY INFORMATION

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| LUMEN OUTPUT           | 8400-14000Lms                                                                        |
| INPUT POWER ADJUSTABLE | 40/60/80/100W                                                                        |
| INSTALL                | Ceiling Mount                                                                        |
| WARRANTY               | 5 Years                                                                              |
| LIFESPAN               | 50000Hrs                                                                             |
| IP RATING              | IP65                                                                                 |
| IK RATING              | 8                                                                                    |
| HOUSING COLOUR         | White powdercoat finish                                                              |
| OPTIONAL ACCESSORIES   | Photocell Button / Power + CCT Controller / Emergency Battery Backup / Motion Sensor |
| OPERATING TEMP         | -40°C - 40°C                                                                         |

### PHOTOMETRIC

|                   |                   |
|-------------------|-------------------|
| EFFICACY          | 140Lm/W           |
| COLOUR SELECTABLE | 4000K/5000K/6500K |
| BEAM ANGLE        | TYPE 5            |
| CRI               | 80                |

### ELECTRICAL

|               |                           |
|---------------|---------------------------|
| INPUT VOLTAGE | 120-277 VAC Input Voltage |
|---------------|---------------------------|

### CONSTRUCTION

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| MATERIAL CONSTRUCTION | Rugged diecast aluminium , corrosion resistant housing |
| DIMENSIONS            | 265mm x 265mm x 65.1mm                                 |
| WEIGHT                | 3Kg                                                    |
| CERTIFICATION         | RCM (Australian Certified), SAA Driver                 |

### DESCRIPTION:

**NEW GH-C100CCT SMALLER, NEATER, SMARTER**  
**Can replace up to 4 x IP65 Batten Lights**

Achieve brighter, neater, and more efficient lighting at only 25% of the cost. Our powerful, long-life fittings feature an unique lens that replaces four IP65 batten lights with a single, neat unit.


Excellent uniform lighting, energy efficiency and control for surface-mount applications.

Multi-purpose for commercial and industrial use.

It has versatile and functional features, energy-efficient LEDs, rugged diecast aluminium with corrosion-resistant housing.

Highly recommended for Commercial and Industrial applications such as Petrol Stations, Warehouses, Supermarkets, Workshops, Sheds, Parking Areas, Canopies etc.

- High-quality LED chip 140 Lms/W
- Type 5 beam angle
- Power adjustable 100/80/60/40W
- Colour selectable 4000/5000/6500K
- No flickering
- Soft, low glare, uniform light for optimal eye comfort
- Low ceiling areas, large coverage
- Long lifespan
- 5 Year Warranty

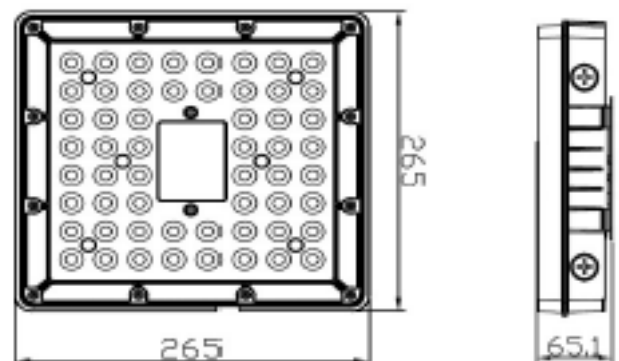

| MODEL     | WATTAGE       | LUMENS       | EFFICACY | CCT             |
|-----------|---------------|--------------|----------|-----------------|
| GH-100CCT | 40/60/80/100W | 8400-14000Lm | 140 Lm/W | 4000/5000/6500k |