

# GH-C100CCT

## LED CANOPY LIGHT



### KEY INFORMATION

LUMEN OUTPUT	5600-14000Lms
INPUT POWER ADJUSTABLE	40/60/80/100W
INSTALL	Ceiling Mount
WARRANTY	5 Years
LIFESPAN	50000Hrs
IP RATING	IP65
IK RATING	8
HOUSING COLOUR	White powdercoat finish
OPTIONAL ACCESSORIES	Photocell Button / Power + CCT Controller / Emergency Battery Backup / Motion Sensor
OPERATING TEMP	-40°C - 40°C

### PHOTOMETRIC

EFFICACY	140Lm/W
COLOUR SELECTABLE	4000K/5000K/6500K
BEAM ANGLE	TYPE 5
CRI	80

### ELECTRICAL

INPUT VOLTAGE	120-277 VAC Input Voltage
---------------	---------------------------

### CONSTRUCTION

MATERIAL CONSTRUCTION	Rugged diecast aluminium , corrosion resistant housing
DIMENSIONS	265mm x 265mm x 65.1mm
WEIGHT	3Kg
CERTIFICATION	RCM (Australian Certified), SAA Driver

### DESCRIPTION:

**NEW GH-C100CCT SMALLER, NEATER, SMARTER**  
**Can replace up to 4 x IP65 Batten Lights**

GH-C100CCT solution for budget-friendly, canopy lighting. With high lumen LED chips giving low glare and uniform light colour. Power Factor =>0.9

It has excellent uniform lighting, energy efficiency and control for surface-mount applications.

It is multi-purpose and can be used in both domestic and commercial applications.


It has versatile and functional features - energy-efficient LED and a rugged diecast aluminium with corrosion-resistant housing.

### SUITABLE FOR:

- Domestic or Commercial Applications
- Sheds, secure entryways, exterior canopies
- Garages
- Parking structures & warehouses

Power Adjustable - 40/60/80/100W

Colour Selectable - 4000k/5000k/6500k

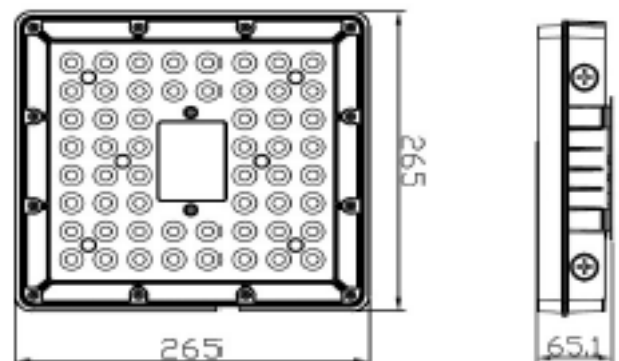

MODEL	WATTAGE	LUMENS	EFFICACY	CCT
GH-100CCT	40/60/80/100W	5600-14000Lm	140 Lm/W	4000/5000/6500k