

GH-WL LINEAR WALL LIGHT 1m / 1.5m



KEY INFORMATION	
LUMEN OUTPUT	1m: 24W - 1200Lms/W / 1.5m: 35W - 1750Lms/W
INPUT POWER ADJUSTABLE	1m - 24W / 1.5m - 35W
INSTALL	Wall mount
WARRANTY	3 Years Limited Warranty
LIFESPAN	50000Hrs
IP RATING	IP67
IK RATING	8
HOUSING COLOUR	Matte Black powdercoat finish
OPERATING TEMP	-40°C - +40°C
PHOTOMETRIC	
DIMMABLE	Yes (with optional controller)
COLOUR SELECTABLE	1m CCT option
COLOUR	3000k Warm White, CCT 2700-6000k
BEAM ANGLE	Back-lit
CRI	>80
ELECTRICAL	
INPUT VOLTAGE	120-277 VAC Input Voltage
CONSTRUCTION	
MATERIAL CONSTRUCTION	Rugged diecast aluminium , corrosion resistant housing and acrylic
DIMENSIONS	1020x45x70mm / 1520x70x45mm
WEIGHT	1.7kg / 2.9kg
CERTIFICATION	CE, IEC, Australian Certified

DESCRIPTION:

GH-WL WITH UNIQUE DESIGN FEATURES


Unlike most side-lit fittings, the GH-WL uses back-lighting to deliver a more even, attractive illumination. Side-lit fittings give an uneven and unattractive lighting effect.

GH- LINEAR WALL LIGHT in either 1m or 1.5m has a sleek contemporary design and comes in an anodised black aluminium housing. It has a waterproof, IP65 fitting and is suitable for coastal areas. Wall mountable.

Wiring can be any height behind the fitting enable the light to be placed at an ideal height.

SUITABLE FOR Domestic or Commercial Applications, Garages and Home Exteriors

1m CCT OPTION - Now Available

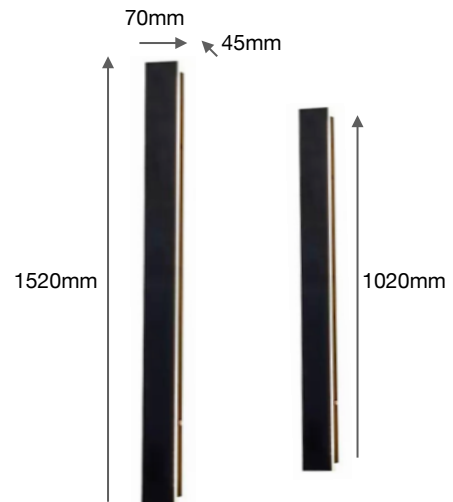

MODEL	WATTAGE	LUMENS	CCT
GH Linear Wall light	1m - 24W / 1.5m - 35W	1m - 1200Lms/W 1.5m - 1750 Lms/W	No