

# GH-WL

## LINEAR WALL LIGHT 1m / 1.5m



### KEY INFORMATION

LUMEN OUTPUT	1m: 24W - 1200Lms/W / 1.5m: 35W - 1750Lms/W
INPUT POWER ADJUSTABLE	1m - 24W / 1.5m - 35W
INSTALL	Wall mount
WARRANTY	3 Years Limited Warranty
LIFESPAN	50000Hrs
IP RATING	IP67
IK RATING	8
HOUSING COLOUR	Matte Black powdercoat finish
OPERATING TEMP	-40°C - +40°C

### PHOTOMETRIC

DIMMABLE	Yes (with optional controller)
COLOUR SELECTABLE	No (1m CCT option coming soon)
COLOUR	3000k Warm White
BEAM ANGLE	Back-lit
CRI	>80

### ELECTRICAL

INPUT VOLTAGE	120-277 VAC Input Voltage
---------------	---------------------------

### CONSTRUCTION

MATERIAL CONSTRUCTION	Rugged diecast aluminium , corrosion resistant housing and acrylic
DIMENSIONS	1020x45x70mm / 1520x70x45mm
WEIGHT	1.7kg / 2.9kg
CERTIFICATION	CE, IEC, Australian Certified

### DESCRIPTION:

#### GH-C100CCT WITH UNIQUE DESIGN FEATURES


Unlike most side-lit fittings, the GH-C100CCT uses back-lighting to deliver a more even, attractive illumination. Side-lit fittings give an uneven and unattractive lighting effect.

**GH- LINEAR WALL LIGHT** in either 1m or 1.5m has a sleek contemporary design and comes in an anodised black aluminium housing. It has a waterproof, IP65 fitting and is suitable for coastal areas. Wall mountable.

Wiring can be any height behind the fitting enable the light to be placed at an ideal height.

**SUITABLE FOR** Domestic or Commercial Applications, Garages and Home Exteriors

#### 1m CCT OPTION - Coming Soon

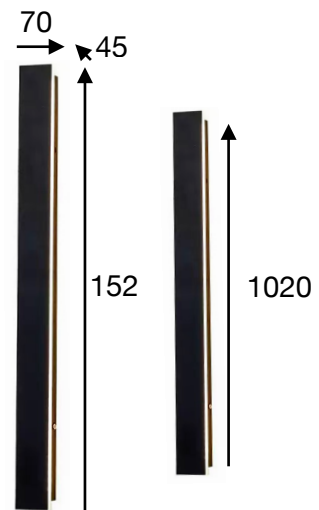

MODEL	WATTAGE	LUMENS	CCT
GH Linear Wall light	1m - 24W / 1.5m - 35W	1m - 1200Lms/W 1.5m - 1750 Lms/W	No