
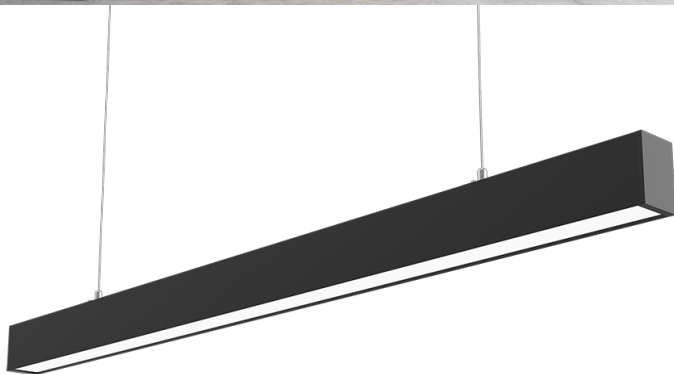


HIGH LUMEN

Modular Linear Lighting System

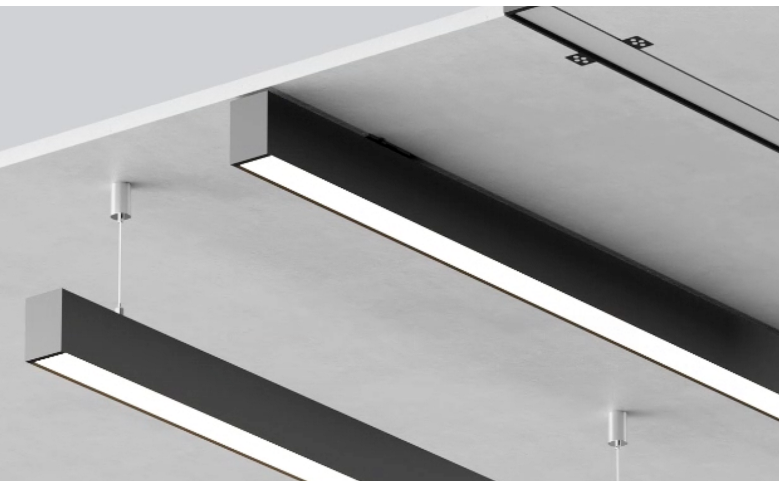

DESCRIPTION:

NEW Versatile and energy-efficient high-lumen modular LED lighting solution designed for retail and commercial environments.

Its modular design allows flexible configurations to suit different store layouts, while the high lumen output ensures bright, uniform illumination that enhances product visibility and creates an inviting shopping atmosphere.

With sleek, modern aesthetics and options for easy installation or reconfiguration, this lighting type supports both functional needs and visual merchandising goals.

Elegant architectural look which is perfect for modern retail and commercial premises.


For hanging or ceiling installation.

SUITABLE FOR:

- Retail or Commercial applications
- Restaurants, bar areas, hotels, offices, meeting rooms, schools, libraries, shopping malls, exhibition centres etc.

FEATURES:


- Up to 7000 Lms/m
- 3 or 5 Power Adjustable
- Dimmable - switch selectable
- 4 CCT Adjustable 3000/4000/5000/6000k
- Modular
- Linkable up to 60m
- Reliable Sosen driver and Philips chips

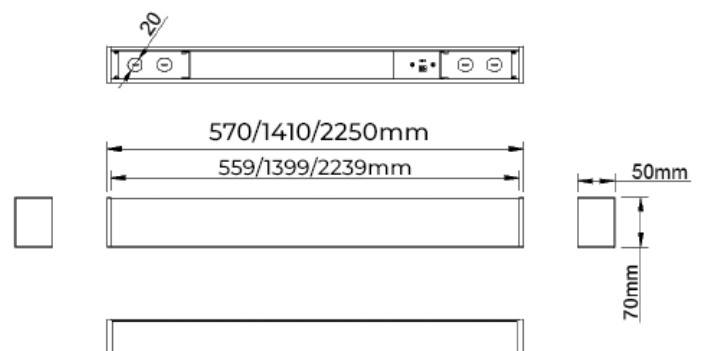


MODEL	LENGTH	LUMENS	EFFICACY	CCT
GH-LL0.5/1.2/2.2	0.57m / 1.13m / 2.25m	Up to 7000Lm per m	130 Lm/W	3000/4000/5000/6000k

KEY INFORMATION	570mm	1130mm	2250mm
LUMEN OUTPUT	4000Lm	7900Lm	15750Lm
POWER	30W	60W	120W
LED QTY	144	288	432
INSTALL	MODULAR Suspension Kits / Ceiling Kits		
WARRANTY	3 Years		
LIFESPAN	50000Hrs		
IP RATING / IK RATING	IP20 / IK08		
HOUSING COLOUR	Black		
OPERATING TEMP	-20°C to + 45°C		
PHOTOMETRIC			
EFFICACY	Up to 130Lm/W - 7000 Lumens per metre		
COLOUR SELECTABLE	3000/4000/5000/6000k		
BEAM ANGLE	120°		
CRI	>80		
DIMMABLE	Yes - switch selectable		
EPISTAR CHIP	2835 Epistar		
POWER FACTOR	>0.9		
ELECTRICAL			
INPUT VOLTAGE	AC100-265V		
OUTPUT VOLTAGE	DC100V		
CONSTRUCTION			
MATERIAL CONSTRUCTION	Rugged diecast 6063 T5 aluminium & PC/PMMA lens		
DIMENSIONS	570mmx50mmx70mm	1130mmx50mmx70mm	2250mmx50mmx70mm
NET WEIGHT	0.88kg	1.48kg	2.96kg
CERTIFICATION	SAA, RCM		



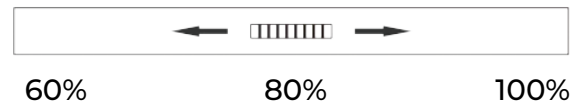

DIY to add light strips
according to your requirements

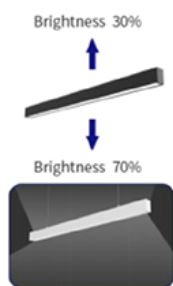

Equipped with high-range
high-efficiency LED
driver. Excellent stability.

Detachable magnetic suction
design for lamp body end-cover

Hanging Installation

Ceiling Installation

Embedded Installation

4CCT Adjust

3 Power Adjust

L / V / Y / X-Shaped Linear Lights

KEY INFORMATION	L (90°Corner)	V	Y	X
POWER ADJUSTABLE	15/17/20/30/40W			
LUMEN OUTPUT	130 Lumens per W			
INSTALL	MODULAR Suspension Kits / Ceiling Kits			
WARRANTY	3 Years			
LIFESPAN	50000Hrs			
IP RATING / IK RATING	IP20 / IK08			
HOUSING COLOUR	Black			
OPERATING TEMP	-20°C to + 45°C			
PHOTOMETRIC				
EFFICACY	Up to 130Lm/W - 7000 Lumens per meter			
COLOUR SELECTABLE	3000/4000/5000/6000k			
BEAM ANGLE	120°			
CRI	>80			
DIMMABLE	Yes - switch selectable			
EPISTAR CHIP	2835 Epistar			
POWER FACTOR	>0.9			
ELECTRICAL				
INPUT VOLTAGE	AC100-265V			
OUTPUT VOLTAGE	DC100V			
CONSTRUCTION				
MATERIAL CONSTRUCTION	Rugged diecast 6063 T5 aluminium & PC/PMMA lens			
DIMENSIONS	255.5x255.50x70mm	383x246x70mm	442.5x383.2x70mm	460.8x460.8x70mm
NET WEIGHT	.76kg	.76kg	1.06kg	1.3kg
CERTIFICATION	SAA, RCM			

