


24W LED PANEL LIGHT GH-P24SE CCT

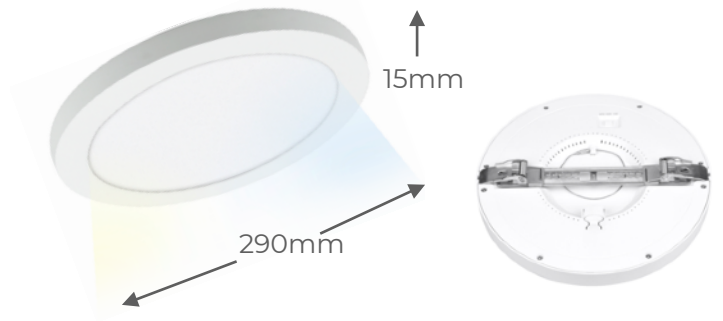

KEY INFORMATION

| | |
|------------------|--------------------------------------|
| LUMEN OUTPUT | 2160 Lumens |
| INPUT POWER | 24W |
| HOLE CUTOUT SIZE | Adjustable from 60-250mm |
| INSTALL | Surface Mount or Recessed with clips |
| DIMMING OPTIONS | Non-Dimmable |
| TRIM COLOUR | White |
| WARRANTY | 3 Years |
| IP RATING | IP20 Indoors |
| FLICKER FREE | Yes |

PHOTOMETRIC

| | |
|---------------------|--|
| EFFICACY | Up to 90 Lms/W |
| LUMEN OUTPUT COLOUR | Natural White 4000k or Bright White 5000k or Cool white 6500k - selectable by switch |
| CRI | >80 |
| BEAM ANGLE | 110° |

ELECTRICAL

| | |
|--------------|---------------------|
| DRIVER | Internal |
| SUPPLY INPUT | AC200-240V, 50-60Hz |
| POWER FACTOR | >0.9 |
| LIFESPAN | 30000Hrs |

CONSTRUCTION

| | |
|-----------------------|--|
| MATERIAL CONSTRUCTION | Thermal plastic frame, PMMA, LGP, Aluminium heatsink |
| SHADE/HOUSING | Matte White with frosted PC Lens |
| LOW HEAT OUTPUT | Yes |
| TOTAL WEIGHT | 0.7kg per piece |
| DIMENSIONS | ø290x15mm |
| CERTIFICATION | CE RCM SAA Plug |

DESCRIPTION:

24W CEILING LIGHT - Oyster Light Replacement. Unique, very versatile ceiling light with three popular and practical colour output options which are selected by switch on the back of the light: Natural (4000k), Bright (5000k) or Cool (6500k). Non-dimmable, no flicker. High CRI, high lumen output with good heat dissipation and no UV.

FEATURES:

- Ultra slim, low profile
- Surface mounted or recessed with clips
- Adjustable fitting, hole size from 55-175mm
- Built in driver, cord and plug
- Flicker-free
- High power factor >0.9
- Comes standard with cover.
- 3 Year Warranty

SUITABLE FOR:

Domestic or commercial applications. Can replace various downlights and Oyster fittings.