

GH-Twin Flood

24W TWIN FLOOD/SENSOR

KEY INFORMATION

LUMEN OUTPUT	1950-2400Lms
POWER	24W (2x12W)
INSTALL	Surface / Wall mount
WARRANTY	3 Years
LIFESPAN	50000Hrs
IP RATING	IP65
IK RATING	IK06
HOUSING COLOUR	White / Black
OPERATING TEMP	-20°C - +40°C

PHOTOMETRIC

EFFICACY	Up to 100 lumens/watt
COLOUR SELECTABLE	3000/4000/5000k
BEAM ANGLE	Up to 180°
CRI	≥80

ELECTRICAL

INPUT VOLTAGE	AC200-240 50/60Hz
---------------	-------------------

CONSTRUCTION

MATERIAL CONSTRUCTION	Rugged diecast aluminium, corrosion resistant housing & PC
DIMENSIONS	76x128.5x120mm
WEIGHT	0.81kg
CERTIFICATION	RCM, Global Mark

DESCRIPTION:

GH-TWS Twin Flood with or without sensor is a cleverly designed twin flood light which is CCT adjustable and has a plug-in Lux/PIR sensor.


ADC12 aluminium housing provides excellent outdoor protection and heat dissipation, allowing for a long 50000Hr lifespan.

FEATURES:

- Easy to plug in/out PIR sensor
- Rotatable and easy to adjust
- ADC12 Aluminium housing for excellent heat dissipation
- Colour Selectable - 3000k/4000k/5000k
- Internal flicker- free driver

SUITABLE FOR:

- Indoor and semi-outdoor lighting applications
- Wide lighting area
- Security

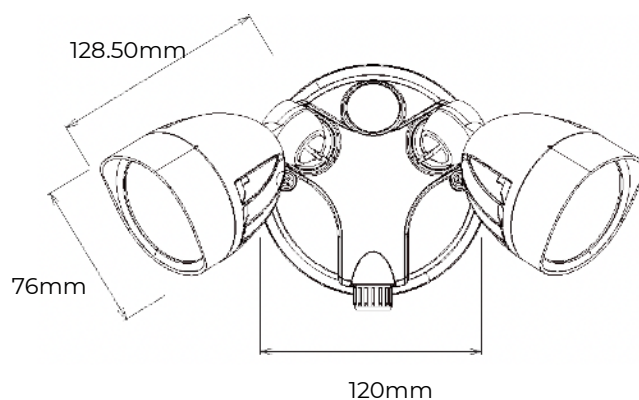

MODEL	WATTAGE	LUMENS	CCT
GH-TWS	24W (12W x 2)	1950-2400Lms	3000/4000/5000k