

GH-WL10 2CCT

10/6w Up/Down Square Wall Light



KEY INFORMATION	WL10 2CCT
LUMEN OUTPUT	500-560Lm (6w) 860-930Lm (10w)
POWER	10W - 5w Up / 5w Down 6w - 3w Up / 3w Down
INSTALLATION	Wall Mount
LED DRIVER	Built-in Driver
DIMMING	Dimmable
PHOTOMETRIC	
EFFICACY	Up to 93 Lms/Watt (10w)
COLOUR SELECTABLE	2 -CCT: 3000K/4000K Selectable
BEAM ANGLE	0-120° Adjustable
CRI	80
INPUT VOLTAGE	AC220-240V, 50-60Hz
CONSTRUCTION	
MATERIAL CONSTRUCTION	ADC12 Diecast Aluminium
SHADE/HOUSING	Black
IP RATING / IK RATING	IP65/IK08
WARRANTY	2 Years
LIFESPAN	50000Hrs
OPERATING TEMP	-20°C~45°C
DIMENSIONS	110 x 110 x 97 mm
WEIGHT	0.68kg
CERTIFICATION	Global Mark, Australian Certified

DESCRIPTION:

The **10w Up/Down Wall Light** is a contemporary architectural light designed to create a refined ambient lighting effect.


Attractive and versatile with a wide adjustable angle of 0°-120°, top and bottom.

Constructed from durable diecast aluminium, the housing provides excellent thermal management for long-lasting performance and reliability with IP65 and IK08 rating.

FEATURES:

- CCT (3000k or 4000k) selectable
- Power adjustable 6w or 10w via dip switch
- Triac dimmable
- High efficiency CRI 80
- Flush mounted to the wall
- Can be used indoors or outdoors
- IP65-rated for reliable performance in both indoor and outdoor applications.
- Integrated flicker-free LED driver ensures smooth, comfortable illumination.

SUITABLE FOR: Commercial, Domestic

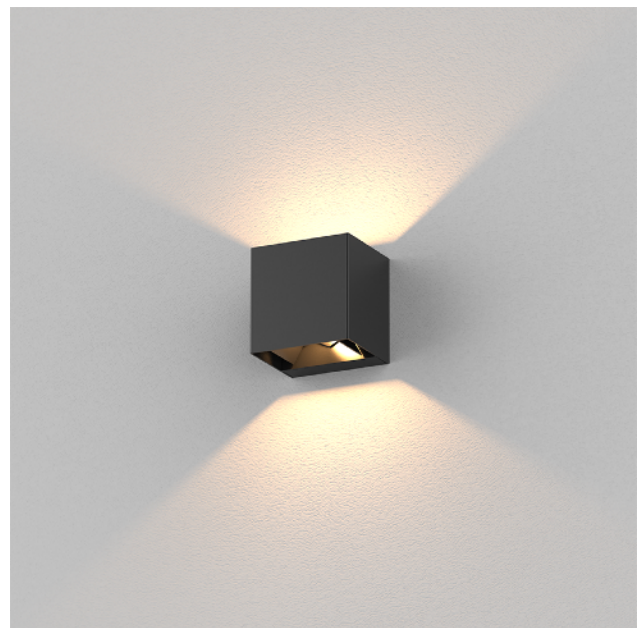

MODEL	WATTAGE	LUMENS	EFFICACY	CCT
WL10 2CCT	10W - 5w Up/ 5w Down 6w - 3w Up/ 3w Down	860-930Lm 500-560Lm	Up to 93Lm/Watt	2-CCT 3000/4000K