INSTALLATION GUIDE

Product code: DL35S

200 mm 35 W Dimmable Downlight – Tricolour

240 V mains power – this light must be installed by a licensed electrician to AS/NZS 3000. Turn the power off at the switchboard first.

IN THE BOX


- 1 × 35 W downlight with white cover
- 1 × dimmable driver for the light

YOU WILL NEED

- Circle cutter or hole saw, 200–210 mm
- Screwdriver
- Pencil
- Safety glasses and dust mask

BEFORE YOU START

- Measure the hole: this light suits holes 200–210 mm wide.
- Keep ceiling insulation away from the light and driver. Allow 45 mm of depth plus room for the driver.
- Check your dimmer is suitable for LED lights.

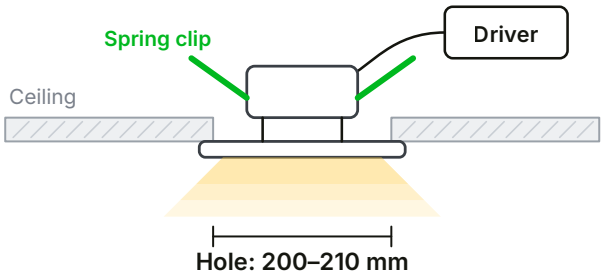

STEP BY STEP

1. Turn the power off at the switchboard.
2. Remove the old light, or cut a round hole 200–210 mm wide.
3. Set the colour switch to 3000 K, 4000 K or 5000 K.
4. Open the driver's terminal cover, connect the 240 V active and neutral, then refit the cover.
5. Plug the driver into the light.
6. Place the driver in the ceiling, clear of insulation.
7. Hold the spring clips back and push the light into the hole.
8. Turn the power on and test the light and dimmer.

SETTINGS & USE

- Colour switch: 3000 K warm, 4000 K natural, 5000 K bright.
- Set the colour before fitting.

DO NOT

- Don't cover the light or driver with insulation.
- Don't work on the light with the power on.
- Don't use a dimmer that isn't made for LED lights.

CARE & TROUBLESHOOTING

- Turn the power off and wipe with a soft, dry cloth.
- If it flickers or won't light, check the plug between driver and light; if it keeps happening, call Greenhse on (08) 9297 2969.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.