Glenelg Ambient Up/Down Wall Light – White or Charcoal

240 V hard-wired light: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × Glenelg Ambient up/down wall light
- 2 × 4 W LED GU10 globes (fitted)

YOU WILL NEED

- Drill and masonry bit
- Wall plugs and screws to suit the wall
- Screwdriver and wire stripper
- Spirit level

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Check the cable comes out where the light's wall mount will sit.
- Use a normal on/off switch – the supplied globes are not dimmable.

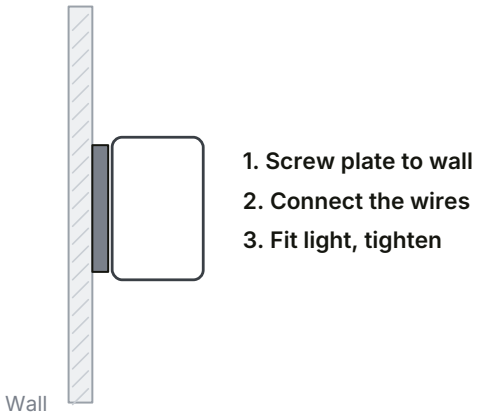

STEP BY STEP

1. Open the light and take off the wall mount as shown in the leaflet in the box.
2. Hold the mount level on the wall, mark and drill the holes, and fit wall plugs.
3. Feed the cable through the seal and screw the mount to the wall.
4. Connect Active (L), Neutral (N) and Earth to the terminal block.
5. Refit the light so all seals sit flat and tighten the screws.
6. Check both GU10 globes are pushed in and twisted until they lock.
7. Turn the power on and check the light shines up and down.

DO NOT

- Don't fit GU10 globes over 35 W each. LED GU10 globes are recommended.
- Don't use the supplied globes with a dimmer.
- Don't run it with the glass lens cracked or missing.

CARE & TROUBLESHOOTING

- Wipe the body and glass with a soft damp cloth.
- One end not working? Turn off the power and replace that GU10 globe.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years replacement. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.