



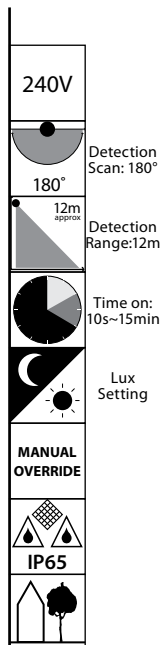

# VERSA-SCAN

180° PIR SECURITY SENSOR

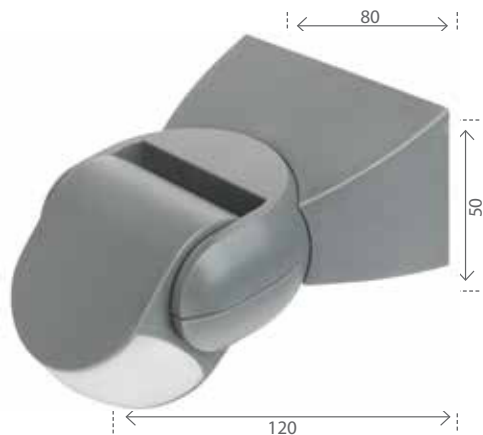

Passive Infra-red technology.  
 Multi-segmented lens for better detection.  
 Adjustable sensing angle.  
 Reliable 3-wire design.  
 Adjustable time and lux level.  
 Manual override.  
 IP65 weather-resistant rated.  
 Resets to AUTO mode after 8 hours  
 Wall mount  
 Lux control level : 3-2000LUX (adjustable)  
 Max Load : 1200W Incandescent Lamp  
                   300W Fluorescent Lamp  
                   150W LED Lamp

2 Year Warranty.

Product	Code	Colours	
Sensor	<b>20046/..</b>	<b>08</b> GREY	<b>09</b> BEIGE