INSTALLATION GUIDE

Product code: DL03-ALL

30 mm 3 W LED Star Light

The driver runs on 240 V – it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × 3 W star light (your colour and cover) with 2 m cable

YOU WILL NEED

- Drill with 30 mm hole saw
- Ladder
- Tape measure and pencil
- Electrician's tools

BEFORE YOU START

- Choose the driver: 3-pin for 1 to 3 lights (not dimmable); 4-pin for 3 to 4 or 6-pin for 3 to 6 lights (dimmable).
- Each light is 38 mm deep – check the space above each spot is clear of joists, pipes and cables.
- Make sure every light can reach the driver with its 2 m cable.

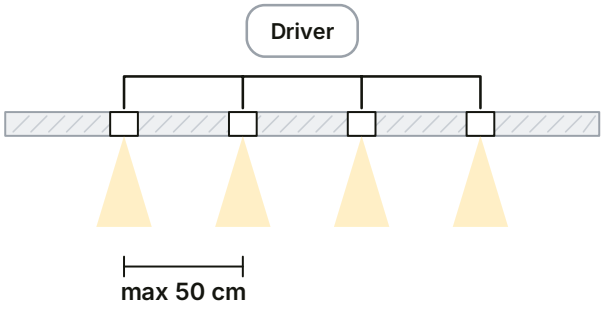

Small hole, plug into driver, push up

STEP BY STEP

1. Plan the layout: keep lights no more than 50 cm apart and within 2 m of the driver spot.
2. Turn the power off at the switchboard.
3. Drill a 30 mm hole at each mark.
4. Electrician connects the driver to the 240 V lighting circuit (through an LED dimmer for 4 or 6-pin), using a plug base or junction box.
5. Plug each light's cable into a port on the driver's connector box.
6. Every port should now have a light in it (the driver was chosen to match – see Before you start). If a port must stay empty, fit a link connector in it.
7. Fold the spring clips up and push each light into its hole.
8. Turn the power on and test all lights.

SETTINGS & USE

- 4-pin and 6-pin drivers: use a leading or trailing edge LED dimmer (3–100%).

DO NOT

- Don't cut, join or extend the 2 m light cable.
- Don't put fewer than 3 lights on a 4-pin or 6-pin driver.
- Don't cover the lights or driver with ceiling insulation.
- Don't use outdoors or in wet areas.

CARE & TROUBLESHOOTING

- Wipe the trim with a dry cloth.
- If lights don't come on, check every port has a light or link connector and plugs are pushed fully in.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty.
Warranty: 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.