INSTALLATION GUIDE

Product code: DL03-4KIT

4 × 3 W LED Star Light Kit – Dimmable

The driver runs on 240 V – it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 4 × 3 W star lights (your colour and cover), each with a 2 m cable
- 1 × 4-pin dimmable driver with 4-port connector box

YOU WILL NEED

- Drill with 30 mm hole saw
- Ladder
- Tape measure and pencil
- Electrician's tools

BEFORE YOU START

- Each light is 38 mm deep – check the space above each spot is clear of joists, pipes and cables.
- Make sure every light can reach the driver with its 2 m cable.
- Lights are for indoor, dry areas only (IP20).

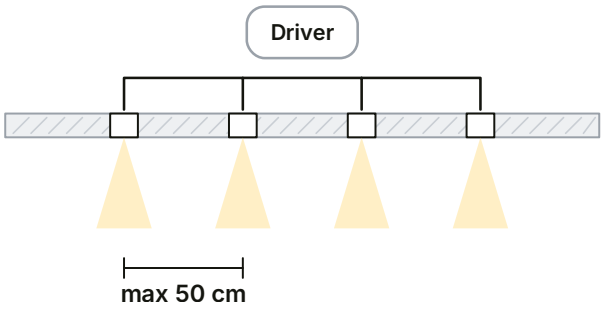

Small hole, plug into driver, push up

STEP BY STEP

1. Plan the layout: keep lights no more than 50 cm apart and within 2 m of the driver spot.
2. Turn the power off at the switchboard.
3. Drill a 30 mm hole at each mark.
4. Electrician connects the driver to the 240 V lighting circuit through an LED dimmer, using a plug base or junction box.
5. Feed each light's cable to the driver and plug it into a port on the connector box (4 ports).
6. Lay the driver on the ceiling, not under insulation.
7. Fold the spring clips up and push each light into its hole.
8. Turn the power on and test all lights.

SETTINGS & USE

- Use a leading or trailing edge LED dimmer. Dimming range is 3–100%.

DO NOT

- Don't cut, join or extend the 2 m light cables.
- Don't leave a driver port empty – use all 4 lights, or fit a link connector in the spare port.
- Don't cover the lights or driver with ceiling insulation.
- Don't use outdoors or in wet areas.

CARE & TROUBLESHOOTING

- Wipe the trim with a dry cloth.
- If the lights don't come on, check every plug is pushed fully into the connector box. If they flicker, check the dimmer is LED-rated.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.