INSTALLATION GUIDE

Product code: WL6-RGBW

6 W Wi-Fi Up/Down Cube Wall Light – Colour + White, Black

Licensed electrician recommended. Wiring is 240 V: a licensed electrician must install it (AS/NZS 3000). The app setup can be done afterwards.

IN THE BOX


- 1 × smart cube wall light with built-in driver and lead
- IP65 waterproof cable connector

YOU WILL NEED

- Drill and masonry bit
- Wall plugs and screws to suit the wall
- Screwdriver
- Wire stripper
- Smartphone with the Smart Life app

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Check there is a strong Wi-Fi signal where the light will go. A Wi-Fi extender may be needed.
- Wire it to a normal on/off switch, not a dimmer. Leave the switch on so the app can control it.

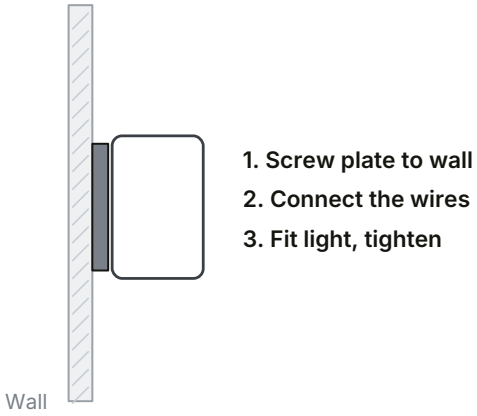

STEP BY STEP

1. Electrician: undo the screw underneath and take the light body off its wall plate.
2. Electrician: mark, drill and plug the wall, then screw the plate on level.
3. Electrician: join the supply to the light's lead in the IP65 connector – Active (L), Neutral (N), Earth – and tighten the seals.
4. Electrician: refit the light body, tighten the screw underneath and turn the power on.
5. You: install the Tuya Smart or Smart Life app and create an account.
6. You: stand near the light with your phone on your home Wi-Fi. Tap + in the app, add the light and follow the app steps.
7. You: name the light, then set colours, brightness, timers or groups.

SETTINGS & USE

- App: on/off, full colour, white, brightness, timers, schedules and groups.
- Voice: link the Smart Life skill in Amazon Alexa or Google Home.

DO NOT

- Don't connect it to a wall dimmer – dim it in the app.
- Don't turn it off at the wall switch if you want app or voice control.
- Don't join the wires without the waterproof connector outdoors.

CARE & TROUBLESHOOTING

- Wipe with a soft damp cloth. No solvents.
- Not found in the app? Move the router or add a Wi-Fi extender, then try again.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty. **Warranty:** 2 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.