INSTALLATION GUIDE

Product code: GH-LL-All-1

Black Modular Linear Light System – 4 Colour

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX


- 1 × linear light module (driver built in)
- Ceiling clips and hanging wire kits (2 of each; 3 with the 2.25 m)
- 1 × joining connector and 1 × cable grommet

YOU WILL NEED

- Drill and screwdriver
- Tape measure and laser level
- Wire stripper
- Voltage tester
- End covers (if not in the box)

BEFORE YOU START

- Plan the layout and check the whole run is no more than 60 m or 2400 W from one supply (the built-in through-wiring is 3 × 1.5 mm²).
- Indoor, dry areas only.
- Turn off the power at the switchboard and test it is dead.

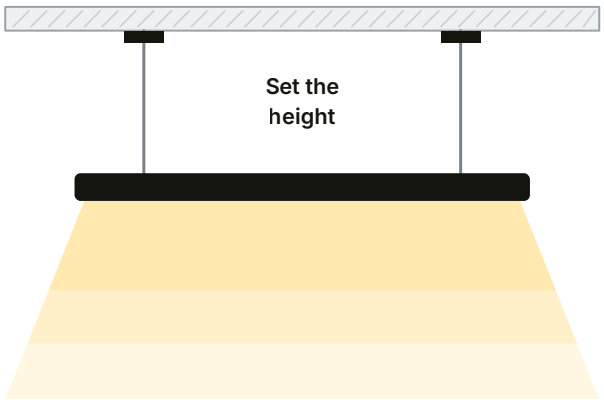

STEP BY STEP

1. Set the colour and power switches on each module before mounting.
2. Mark the fixing points along the run with a laser level.
3. Hanging: fix the ceiling anchors, hang the wires and adjust the height.
4. Ceiling mount: screw the clips to the ceiling at the marks.
5. Feed the 240 V cable through the grommet into the first module.
6. Connect Active, Neutral and Earth to the terminal block in that module.
7. Join the next module with the connector so the wiring links through.
8. Hang or clip each module level, fit the end covers, then power on.

SETTINGS & USE

- Colour switch: 3000 K, 4000 K, 5000 K or 6000 K.
- Power switch: 3 settings on straights (e.g. 80/100/120 W), 5 on joins (15–40 W).
- Set every module in a run the same so the light looks even.

DO NOT

- Don't link more than 60 m or 2400 W from one supply.
- Don't connect to a dimmer.
- Don't use in wet areas or outdoors (IP20).

CARE & TROUBLESHOOTING

- Turn off, then dust with a soft dry cloth.
- If one section stays dark, check the joining connector is fully pushed in.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty.
Warranty: 3 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.