INSTALLATION GUIDE

Product code: F50-RGB

50 W RGB + White LED Floodlight – 25° or 160°

240 V hard-wired product: it must be installed by a licensed electrician to AS/NZS 3000.

IN THE BOX

- 1 × 50 W RGB + white LED floodlight with supply cord
- 1 × mounting bracket (fitted)
- Remote control and Wi-Fi gateway are sold separately

YOU WILL NEED

- Drill and fixings to suit the wall, pole or ground mount
- Spanner and screwdriver
- Weatherproof (IP-rated) junction box
- Wire stripper and voltage tester

BEFORE YOU START

- Turn off the power at the switchboard and test it is dead.
- Buy a Greenhse 2.4 GHz RGB + colour temperature remote (1-zone or 4-zone, sold separately).
- Plan where lights go – each light must be within 30 m of the next for the signal to pass on.

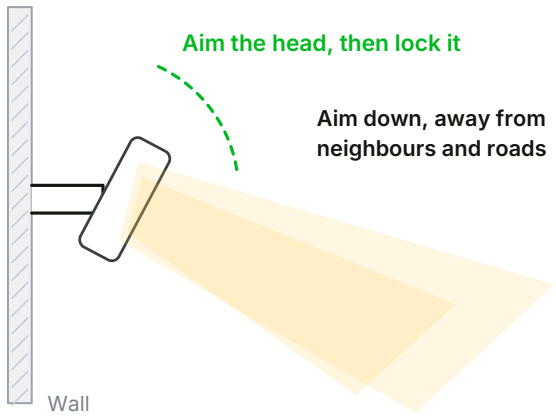

STEP BY STEP

1. Electrician: fix the bracket to the wall, pole or ground mount with suitable fixings.
2. Electrician: bring the 240 V supply through a wall switch to a weatherproof junction box near the light. The switch is needed to pair the remote.
3. Electrician: connect Brown = Active, Blue = Neutral, Green/Yellow = Earth, then seal the box.
4. Loosen the bracket bolts, aim the light, then tighten the bolts firmly.
5. Turn the power on and pair the remote (see Settings) – the light blinks 3 times when paired.
6. Use the remote to pick colours, white, brightness and the 9 modes.

SETTINGS & USE

- Pair: power off, power on, then press the zone ON button 3 times within 3 seconds (light blinks 3 times).
- Unpair: power off, power on, then press the same zone ON button 5 times within 3 seconds (light blinks 10 times).
- Lights paired to one zone work together and stay in sync within 30 m of each other.
- App and voice control: add the optional 2.4 GHz Wi-Fi gateway and follow its app setup.

DO NOT

- Don't fit a wall dimmer – dim with the remote or app.
- Don't cover the light or its fins – it runs warm.
- Don't open the light – there are no user parts inside.
- Don't mount it near large metal areas – they shorten the remote range.

CARE & TROUBLESHOOTING

- Power off, then wipe the glass with a soft damp cloth.
- If the remote stops working, change the remote batteries and pair the light again.

Installation: Greenhse recommends that every product is installed by a licensed electrician to AS/NZS 3000 and local rules. Any work on 240 V wiring must be done by a licensed electrician. Incorrect installation can be unsafe and may void the warranty.
Warranty: 2 years. Keep your invoice and the electrician's certificate of compliance. Questions? Call (08) 9297 2969 or visit greenhse.com.